
FLESSIBILI DN 13

FLESSIBILI PER SCALADABAGNO, CALDAIE ED ELETTRODOMESTICI
FLEXIBLES HOSES FOR WATER HEATERS, BOILERS AND HOUSEHOLD APPLIANCES

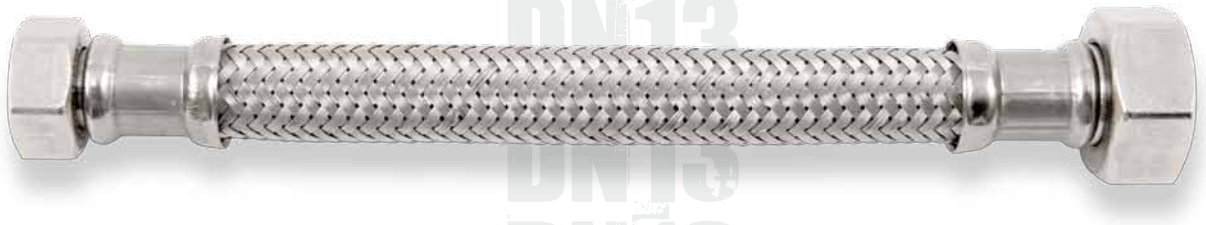

DATI TECNICI - TECHNICAL DATA:


Tubo flessibile trecciato made in italy in acciaio Inox AISI 304 con interno in gomma alimentare EPDM utilizzato prevalentemente per il collegamento tra la rete idrica e i rubinetti singoli, gli scaldabagni, le pareti doccia attrezzate e le vasche idromassaggio oltre che ai rubinetti posti sulle cucine industriali. Tutti i flessibili sono raccordati con macchine automatiche ed il risultato e' l'assoluta precisione di ogni pezzo prodotto per una garanzia di totale qualità.

Made in Italy braided hose in AISI 304 stainless steel with internal in non-toxic EPDM rubber, mainly used for the connection between the water mains and the single faucet, the boilers, the equipped shower sets and the hydromassage tubs, besides the taps are placed on industrial kitchens. All the hoses are produced with automatic machines and the result is the absolute precision of each produced piece for a total quality guarantee.

CARATTERISTICHE - FEATURES:

TEMPERATURA INSTALLAZIONE *INSTALLATION TEMPERATURE*	PRESSIONE D'ESERCIZIO *WORKING PRESSURE*	PORTATA A 3 BAR *FLOW RATE AT 3 BAR*	TEMPERATURA D'IMPIEGO *WORKING TEMPERATURE*	FORO MINIMO PASSAGGIO D'ACQUA *FITTING INNER DIAMETER*	RAGGIO CURVATURA MINIMO *MINIMUM BENDING RADIUS*
da -5°C a +90°C	16 BAR	65 lit/min	-5°C - +90°C	9,3 mm	45 mm

MATERIALI - MATERIALS

TUBO *HOSE*		Ø INTERNO *INNER Ø* 13 mm	Ø ESTERNO *OUTER Ø* 18 mm	Treccia 9 fili Ø 0,22mm in acciaio Inox AISI 304 Tubo interno: gomma EPDM atossico. *9 wires braid Ø 0,22mm in steel Inox AISI 304* *Internal pipe: EPDM rubber, atoxic.*
RACCORDI *FITTINGS*		CW614N CW617N		Ottone CW614N CW617N nichelato o giallo *Brass CW617N nickel plated or yellow*
BUSSOLE *SLEEVES*		Ø 20 mm		Acciaio Inox AISI 304 *Stainless steel AISI 304*

FLEXITALY®